
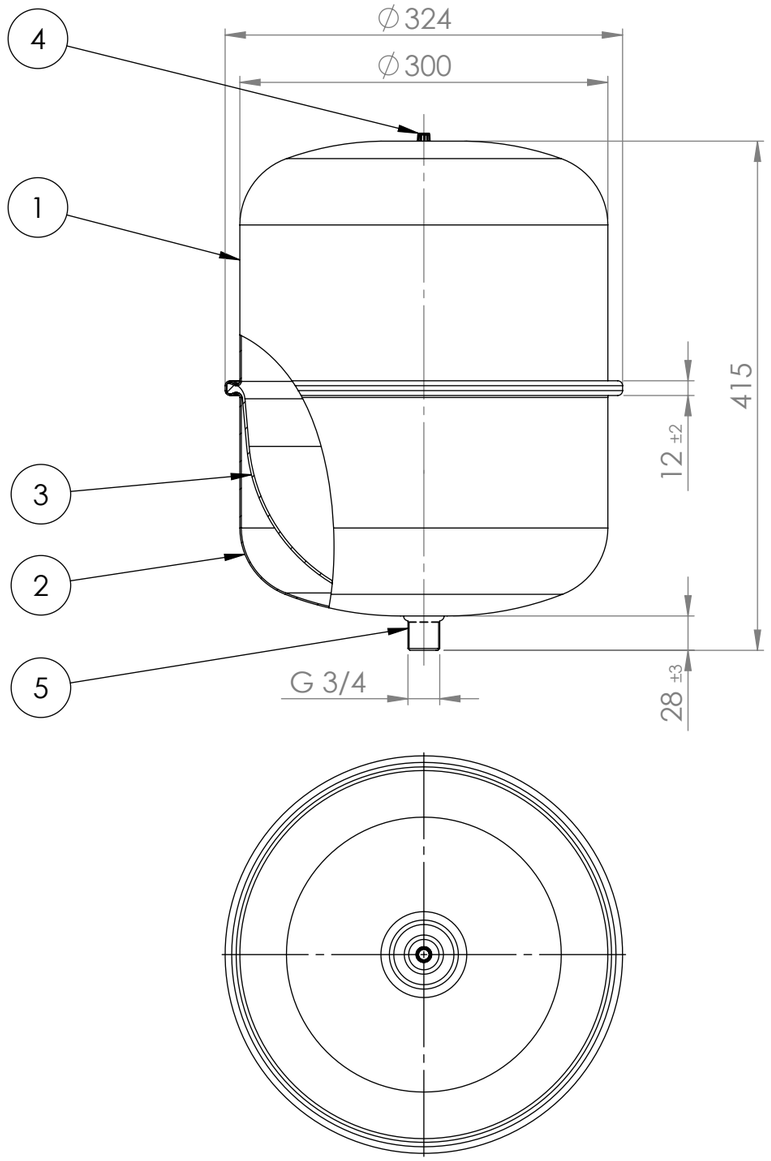


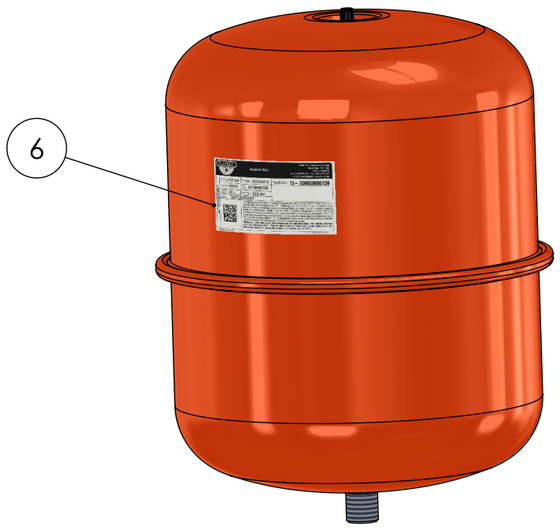

Max operating pressure:	4 bar		
System temperature	-10 / +99 °C		
Membrane temperature:	-10 / +70 °C		
Factory precharge:	0.5 +/-20% bar		
Nominal volume:	25 litres		
Colour:	Red		

Pos.	Denomination	Q.ty	Material
1	UPPER HEAD	1	CARBON STEEL
2	DOWNER HEAD	1	CARBON STEEL
3	MEMBRANE	1	ZILAN N
4	PRECHARGE VALVE	1	-
5	THREADED NOZZLE	1	CARBON STEEL
6	SELF-ADHESIVE LABEL	1	-
7	-	-	-
8	-	-	-
9	-	-	-

Revisioni		
Rev.	Descrizione	Data
01	Redesigned with S.W.	02/03/2016

Zilmet S.p.a.
Via del Santo,242
35010 Limena (PD)-ITALY
Tel. +39 049 7664901
Fax +39 049 767321
www.zilmet.com
zilmet@zilmet.it

DENOMINATION
CAL-PRO 25L

DRAWING N°
20013

SCALE
1:5

*:Tolerance variation bigger/lower than 20%
do not compromise the expansion vessel functioning

	DATE	SIGNATURE
DRAWN BALDO A.	02/03/2016	
CHECKED FALCOMER S.	02/03/2016	
APPROVED S.ri BENETTOLO	02/03/2016	

MATERIAL
SEE TABLE

CODE
1300002401

Dimensions in mm

This drawing is the property of company Zilmet S.p.a.
All rights reserved.

A3

All dimension tolerances not indicated are ± 2% for lenght and ± 3mm for diameter